


PIPE TO PIPE MOUNTING TYPE

Special Features:


- Threaded Vertical Port Inlet and Outlets
- Isolation Bonnet on the sides, Equalizing Bonnet on the front.
- Available in Exotic Materials

Applications:

2 valve manifolds are designed for connecting system impulse lines and transmitters. These manifolds are rugged in construction to withstand pressures and temperatures. The manifolds are rated for pressures as high as 6000 PSI at 200°F or 4000 PSI at 500°F with PTFE Packing. For a Higher Temperatures Grafoil Packing is used

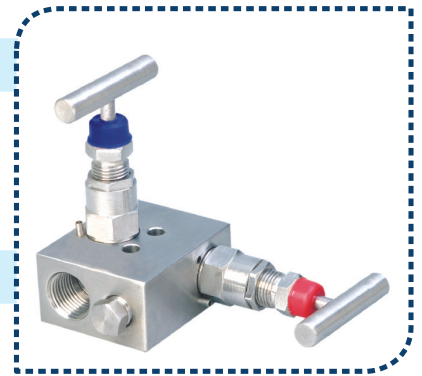

Dimensions:

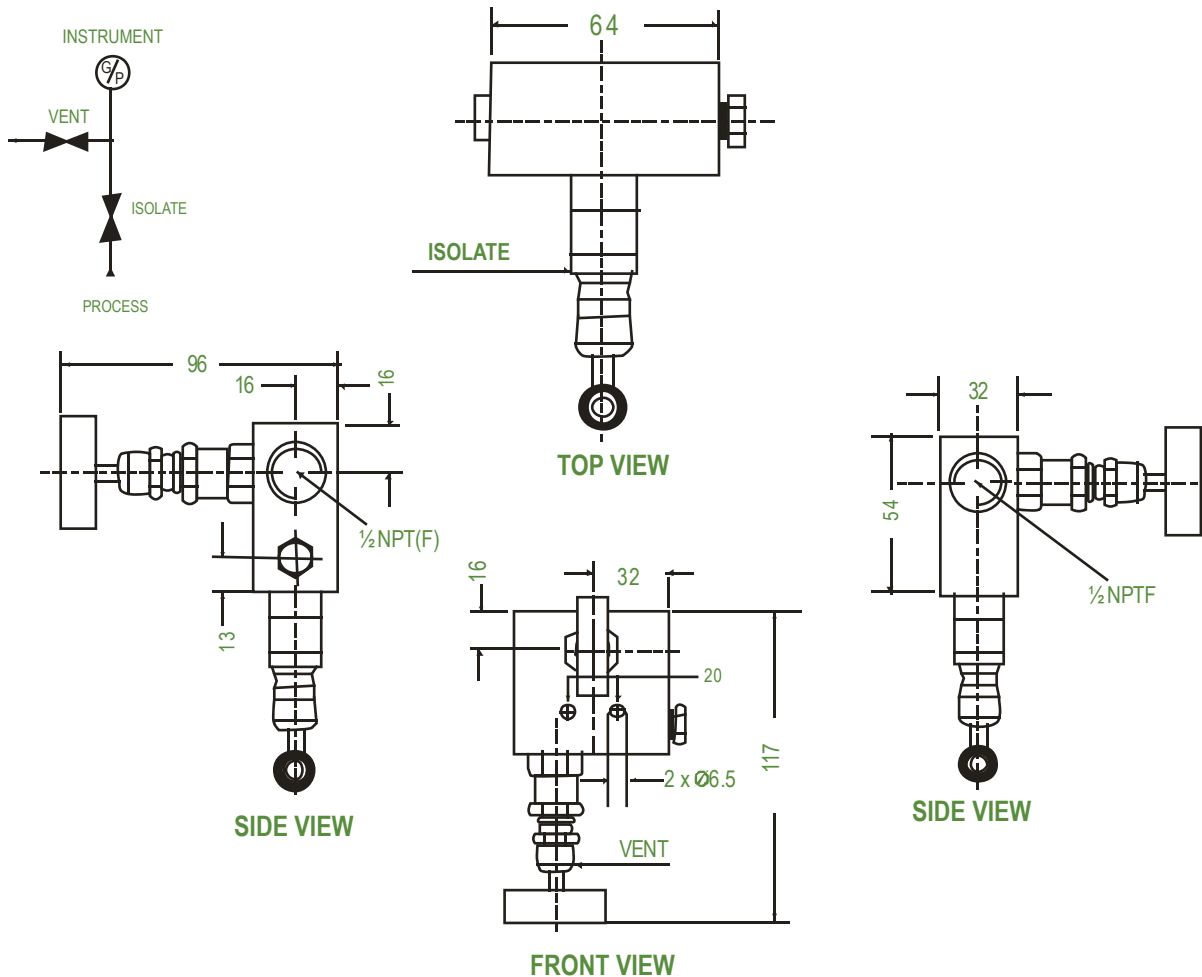

STANDARD CONNECTION

Product	Process Side	Instrument Side	Vent / Drain
2VM	1/2" NPT (F)	1/2" NPT (F)	1/4" NPT (F)